




(ISO F12)
(4)1/2-13 UNC 0.71" DP
ON A Ø4.921" B.C.

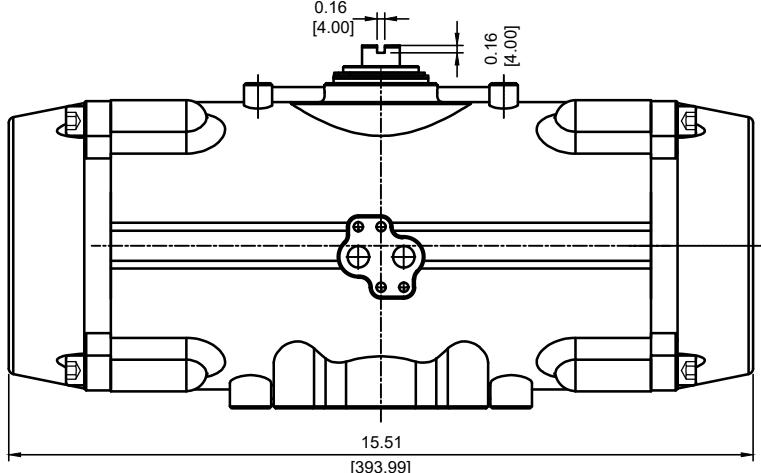


(ISO F10)
(4)3/8-16 UNC 0.59" DP
ON A Ø4.016" B.C.

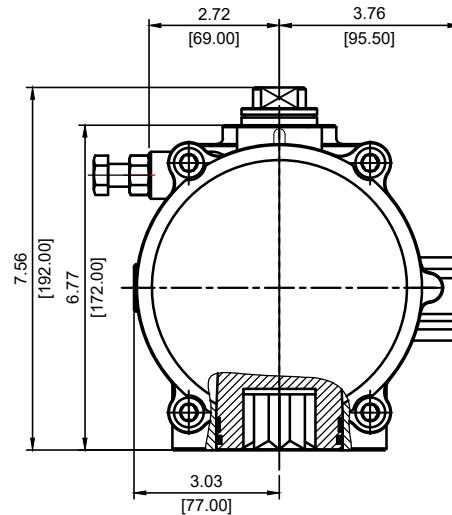

27 mm DRIVE

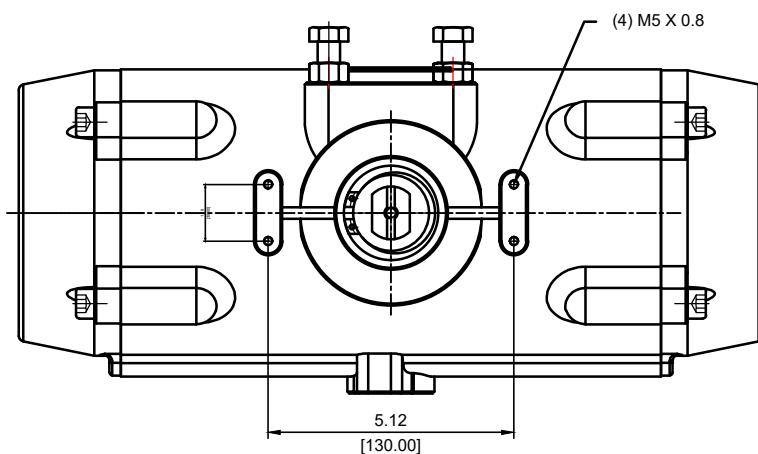

(4) M5 X 0.8

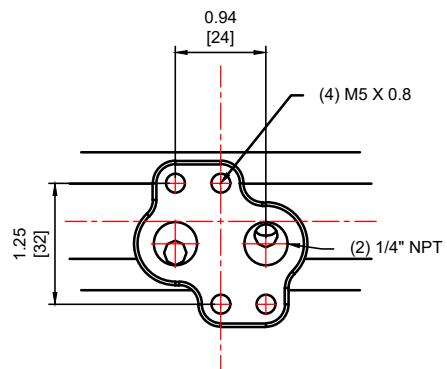

NAMUR 1/4" NPT Air connector

DESCRIPTION

UNITORQ ACTUATORS
"A" SERIES SS, SIZE 417
ENVELOPE DIMENSIONS &
NAMUR MOUNTING PATTERNS

NOTICE:

THIS DRAWING INCLUDES THE DESIGN AND PRINCIPLES
DISCLOSED AND IS THE SOLE PROPERTY OF UNITORQ
AND ITS AFFILIATES. IT SUBMITTED WITH THE
UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED,
NOR COPIED IN WHOLE OR IN PART, NOR LOANED OR
OTHERWISE COMMUNICATED TO ANY THIRD PARTY, NOR
USED IN ANY MANNER DETERMINANT TO THE INTERESTS
OF UNITORQ OR ANY OF ITS AFFILIATES WITHOUT THE
EXPRESSED WRITTEN CONSENT OF UNITORQ.
ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS
AN AGREEMENT TO THE ABOVE.

2150 Boggs Road, Suite 410
DULUTH, GEORGIA U.S.A. 30096

Ph: 770-446-7074

Fax: 770-447-1825

www.unitorq.com

ISO 9001:2015

CERTIFIED COMPANY



PRI Registrar

PERFORMANCE REVIEW INSTITUTE

PRODUCT	PART NUMBER	SALES DRAWING NO.	DWN BY:	DATE:	SCALE:	REV.
ACTUATOR	A417	A417-LAYOUT-TQ	KTL	08/16/2022	N.T.S.	0